


**NEW
IMPROVED**

MODEL 125-D



TH440-T4

Left Axle output to case cover



TH440-T4

Right Axle

TH125,C

both



RIGHT & LEFT AXLE SEAL INSTALLER

for  **TURBO-HYDRAMATIC 125, 125C & 440-T4**

To install the seal into case:

1. Select correct tube to be used.
2. Position 350-A driver handle into the 125-D installer. Place a new seal over tube

- The unique shape retains the seal insuring it is installed correctly.

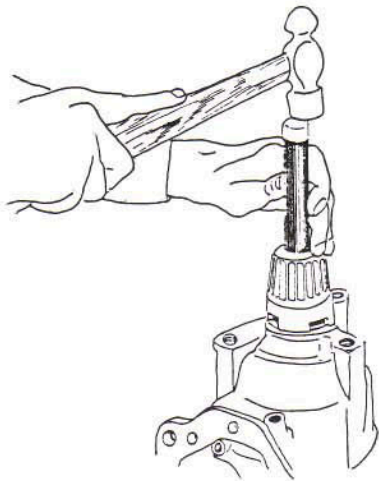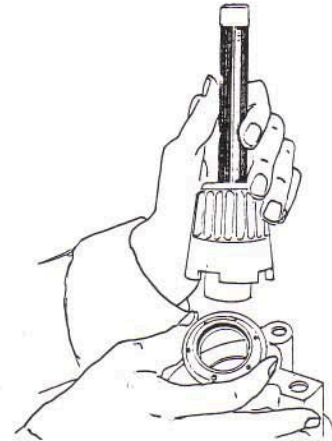


3. Drive seal until tool bottoms.

- The 350-A driver handle has a plastic head for dead blow driving, eliminating the possibility of dropping the lip seal garter spring.

Repeat the above procedure for the side cover axle seal, in or out of car.

- When installing the side cover seal (while still in the car) the 300-C extension handle can also be used.

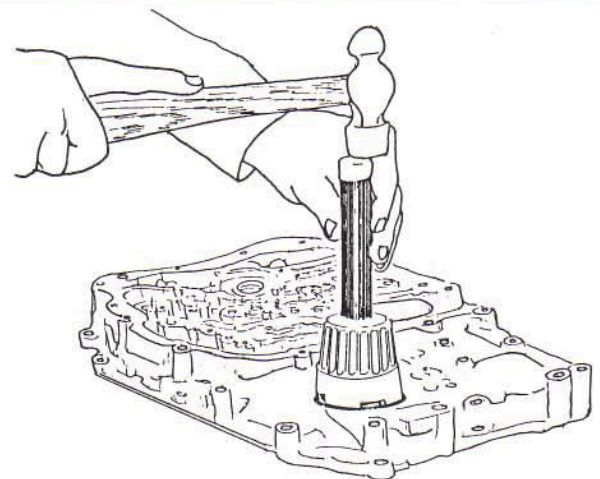

A to Z Tool, Inc.

144 W. Commercial St., Wood Dale, IL 60191

Phone: (630) 787-0478 Fax: (630) 787-0494

MADE IN U.S.A.



**Always wear
safety goggles**